



SPECIFICATIONS



LIFTING CAPACITY	3,5t ≈ 7,700 lb
LIFTING HEIGHT	≤ 1900mm ≈ ≤ 74.80"
PLATFORM LENGTH	2,040mm ≈ 80.3"
PLATFORM WIDTH	610mm (each) ≈ 24" (each)
OVERALL WIDTH	2,160mm ≈ 85"
OVERALL HEIGHT (CLOSED)	115mm ≈ 4.53"
HYDRAULIC PRESSURE	25MPa ≈ 3,625psi
LIFTING TIME	< 60s
POWER SUPPLY	3.0kW ≈ 4hp
NET WEIGHT	750kg ≈ 1,650lb

Double Scissor Lift h1900 mm

Cod: 10002249

- Precision Leveling System**
 Advanced design for fast and accurate adjustment
- Integrated Safety Solutions**
 Dual hydraulic interlock system combined with hydraulic lock for maximum operator protection.
- Ultra-Low Profile**
 Minimum height of just 115 mm, extending up to 1900 mm with optional adapters for different vehicle types.
- Extendable Platform**
 Platform length of 1470 mm, extendable up to 2040 mm for larger vehicles.
- Versatile Installation**
 The lift can be installed either above ground or flush-mounted (in-ground), offering maximum flexibility and optimal integration into the workspace.
- Robust Structure**
 Solid steel scissor arms designed for strength and long-term reliability under demanding working conditions.
- Dual-Circuit Technology**
 Ensures superior stability and operational safety during lifting and lowering phases.

Designed for quick tire service and light maintenance operations in professional body shops.

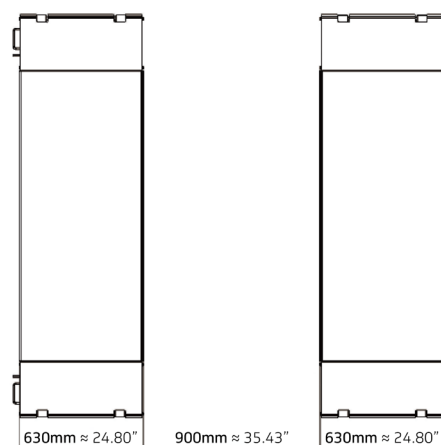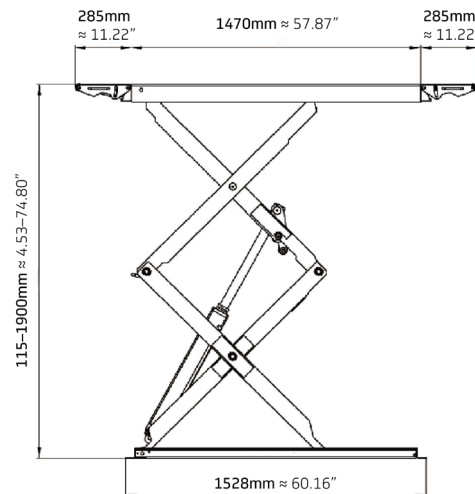



SPECIFICATIONS

LIFTING CAPACITY	3,2 t
LIFTING HEIGHT	≤ 1000 mm
PLATFORM LENGTH	1500–2070 mm
PLATFORM WIDTH	520 mm
OVERALL WIDTH	1898 mm
OVERALL HEIGHT (CLOSED)	110 mm
HYDRAULIC PRESSURE	25 MPa
LIFTING TIME	< 45 s
POWER SUPPLY	2,2 kW
NET WEIGHT	~ 600 kg

Double Scissor Lift h1000 mm

Cod: 10002259

- Precision Leveling System**
 Advanced design for quick and accurate adjustment.
- Integrated Safety Solutions**
 Independent dual hydraulic circuit with anti-explosion valves, safety photocell, active buzzer during lowering, and time relay for controlled descent sequence.
- Ultra-Low Profile**
 Resting height: 110 mm, maximum lifting height: ≤ 1000 mm.
- Extendable Platform**
 Length: 1500 mm, extendable up to 2070 mm; platform width: 520 mm each.
- Versatile Installation**
 The lift can be installed either above ground or flush-mounted (in-ground), offering maximum flexibility and optimal integration into the workspace.
- Robust Structure**
 Double-scissor mechanism with reinforced base and synchronized arms for smooth and uniform movement.
- Dual-Circuit Technology**
 Ensures stability and operational safety even in the event of a circuit failure.

Ideal for inspections, general maintenance, and control operations in professional body shops.

